




Cartridges

with tapered screw adjustment, μm -accurate adjustable

Assembly measures

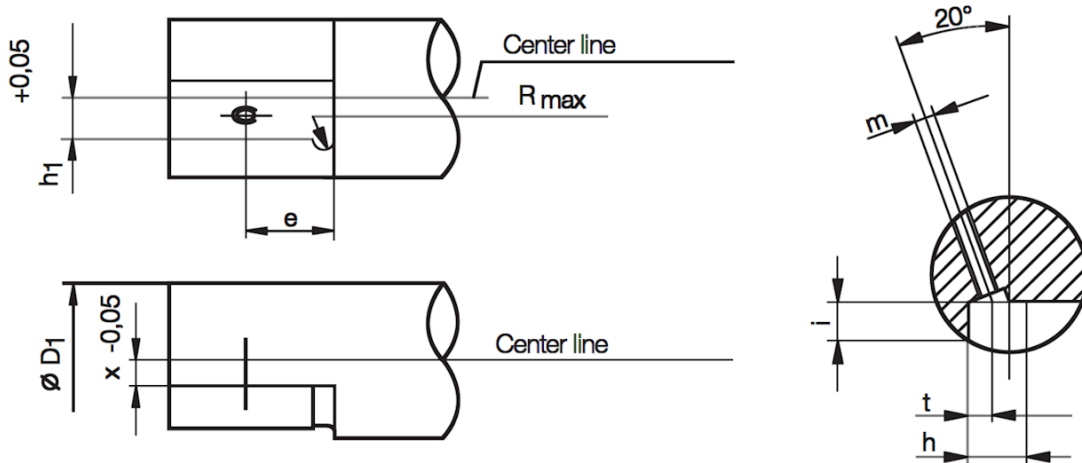

Assembly measures for:								
Part number	f	h_1	h	t	e	R_{max}	m	l_{max}
H 1035-2088 0890 R/L CBFP R/L 06 CA-04	8	6	8.5	3.5	12	1.5	M 3.5	5
H 2850-2588 1090 R/L CBFP R/L 08 CA-05	10	8	11	4.5	17	2.5	M 4	6
H 3570-3088 1290 R/L CBFP R/L 08 CA-07	12	8	11	4.5	17	4	M 4	8
H 4090-3588 1490 R/L CBFP R/L 10 CA-09	14	10	14	5	20	4	M 6	9
$X = D / 2 - f$ $D_1 = \sqrt{h_1^2 + (x + i)^2} \cdot 2$								
Minimum machining diameters for:								
Part number	1 cutting edge possible at Ø		2 cutting edges possible at Ø		3 cutting edges possible at Ø			
H 1035-2088 0890 R/L CBFP R/L 06 CA-04	20		25		35			
H 2850-2588 1090 R/L CBFP R/L 08 CA-05	25		30		40			
H 3570-3088 1290 R/L CBFP R/L 08 CA-07	30		35		45			
H 4090-3588 1490 R/L CBFP R/L 10 CA-09	35		40		50			

We reserve the right to make technical changes.