




# Fineboring Tools

Radial adjustment short version (1.5xD)

**1 cutting edge Ø 7 - 20 mm**  
internal coolant, Shank DIN 1835 A

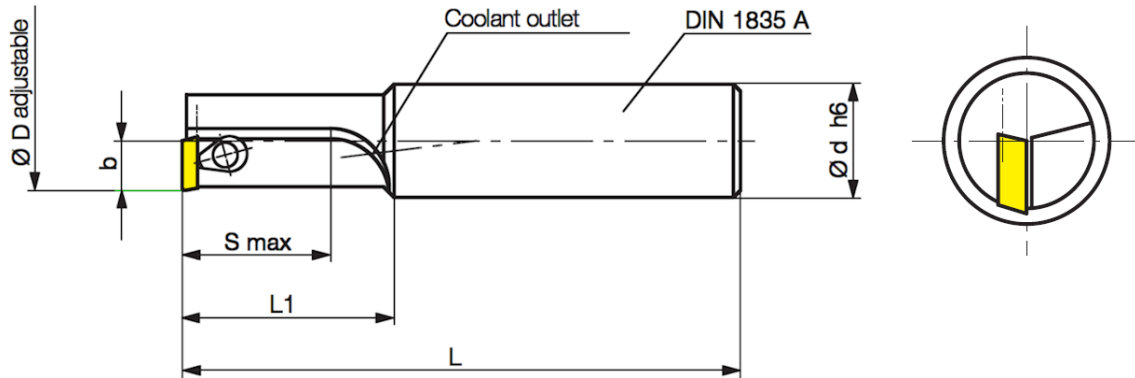

Part nr. 20023	Code	Drawing nr.		b	Ø D	Ø d	S	L <sub>1</sub>	L	Inserts
7,000	H1035-0700	1116R	●	3.9	7 - 8	16	11	19	67	W1035-...L
8,000	H1035-0800	1216R	●	3.9	8 - 9	16	12	20	68	I
9,000	H1035-0900	1416R	●	3.9	9 - 10	16	14	22	70	↓
10,000	H2850-1000	1516R	●	5	10 - 11	16	15	25	73	W2850-...L
11,000	H2850-1100	1716R	●	5	11 - 12	16	17	27	75	I
12,000	H2850-1200	1816R	●	5	12 - 13	16	18	28	76	I
13,000	H2850-1300	2016R	●	5	13 - 14	16	20	30	78	↓
14,000	H3570-1400	2116R	●	7	14 - 16	16	21	31	79	W3570-...L
16,000	H3570-1600	2416R	●	7	16 - 18	16	24	34	82	I
18,000	H3570-1800	2716R	●	7	18 - 20	16	27	37	85	↓

Tools in this series (1.5 x D) are optimal for the production of index bores and as pilot tools for multi-flute reamers.

● ex stock

We reserve the right to make technical changes.