


ISO Taper-toolholders

Shrinking chucks with **lockable coolant channels**

Taper angle AT3, Concentricity from the taper to the holding part < 0.005

SK40/BT40 G 2.5 - 20,000 r.p.m.

Delivery without tool

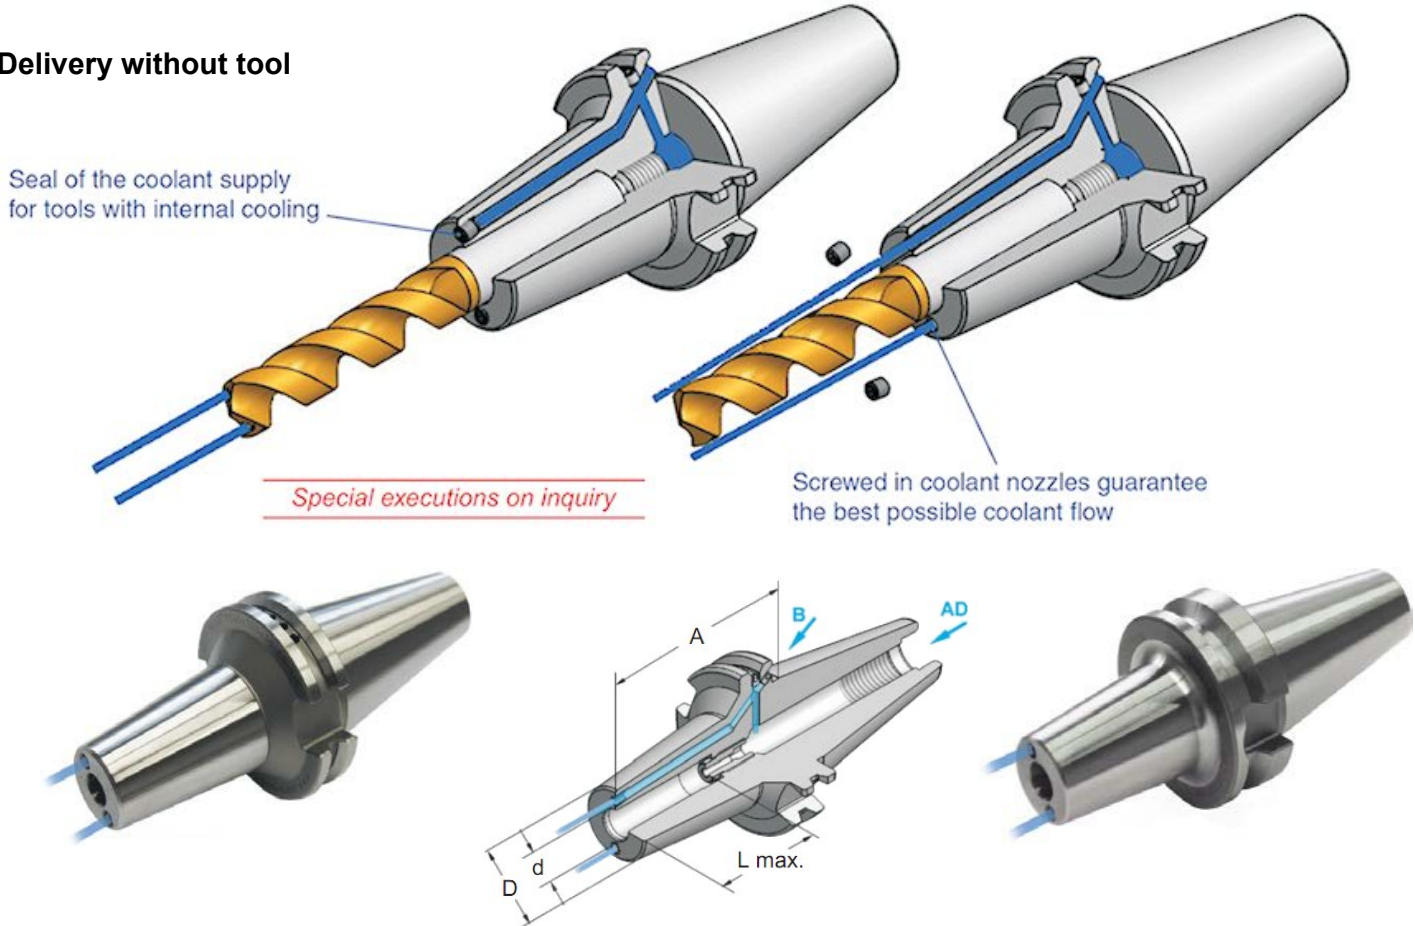

DIN 69871

MAS BT

Art.-Nr.	Type	A	d	D	L	Art.-Nr.	Type	A	d	D	L
40.01.08.36	SK40x08Sx 80-AD+B+C	80	8	24	40	40.05.08.36	BT40x08Sx 80-AD+B+C	80	8	24	40
40.01.10.36	SK40x10Sx 80-AD+B+C	80	10	26	42	40.05.10.36	BT40x10Sx 80-AD+B+C	80	10	26	42
40.01.12.36	SK40x12Sx 80-AD+B+C	80	12	28	47	40.05.12.36	BT40x12Sx 80-AD+B+C	80	12	28	47
40.01.14.36	SK40x14Sx 80-AD+B+C	80	14	30	47	40.05.14.36	BT40x14Sx 80-AD+B+C	80	14	30	47
40.01.16.36	SK40x16Sx 80-AD+B+C	80	16	32	50	40.05.16.36	BT40x16Sx 80-AD+B+C	80	16	32	50
40.01.18.36	SK40x18Sx 80-AD+B+C	80	18	34	50	40.05.18.36	BT40x18Sx 80-AD+B+C	80	18	34	50
40.01.20.36	SK40x20Sx 80-AD+B+C	80	20	36	52	40.05.20.36	BT40x20Sx 80-AD+B+C	80	20	36	52
40.01.25.36	SK40x25Sx 90-AD+B+C	90	25	42	58	40.05.25.36	BT40x25Sx 80-AD+B+C	90	25	42	58


We reserve the right to make technical changes.

Shrinking chucks with **lockable coolant channels**

Taper angle AT3, Concentricity from the taper to the holding part < 0.005

SK50/BT50 G 2.5 - 15,000 r.p.m.

Delivery without tool

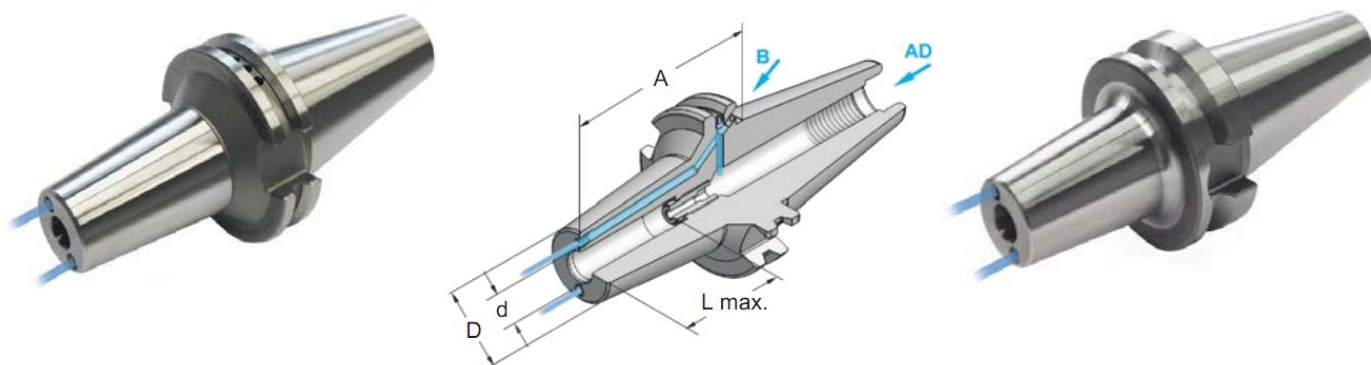

DIN 69871

MAS BT

Art.-Nr.	Type	A	d	D	L	Art.-Nr.	Type	A	d	D	L
50.01.08.36	SK50x08Sx100-AD+B+C	100	8	24	40	50.05.08.36	BT50x08Sx100-AD+B+C	100	8	24	40
50.01.10.36	SK50x10Sx100-AD+B+C	100	10	26	42	50.05.10.36	BT50x10Sx100-AD+B+C	100	10	26	42
50.01.12.36	SK50x12Sx100-AD+B+C	100	12	28	47	50.05.12.36	BT50x12Sx100-AD+B+C	100	12	28	47
50.01.14.36	SK50x14Sx100-AD+B+C	100	14	30	47	50.05.14.36	BT50x14Sx100-AD+B+C	100	14	30	47
50.01.16.36	SK50x16Sx100-AD+B+C	100	16	32	50	50.05.16.36	BT50x16Sx100-AD+B+C	100	16	32	50
50.01.20.36	SK50x20Sx100-AD+B+C	100	20	36	52	50.05.20.36	BT50x20Sx100-AD+B+C	100	20	36	52
50.01.25.36	SK50x25Sx100-AD+B+C	100	25	42	58	50.05.25.36	BT50x25Sx100-AD+B+C	100	25	42	58
50.01.32.36	SK50x32Sx100-AD+B+C	100	32	49	58	50.05.32.36	BT50x32Sx100-AD+B+C	100	32	49	58
50.01.10.362	SK50x10Sx130-AD+B+C	130	10	26	42						
50.01.12.362	SK50x12Sx130-AD+B+C	130	12	28	47						
50.01.16.362	SK50x16Sx130-AD+B+C	130	16	32	50						
50.01.20.362	SK50x20Sx130-AD+B+C	130	20	36	52						
50.01.25.362	SK50x25Sx130-AD+B+C	130	25	42	58						
50.01.32.362	SK50x32Sx130-AD+B+C	130	32	49	58						

We reserve the right to make technical changes.