


## Collets

Collets DIN 6499 sealed  
for tools with inner cooling systems  
**Only for nominal diameter**

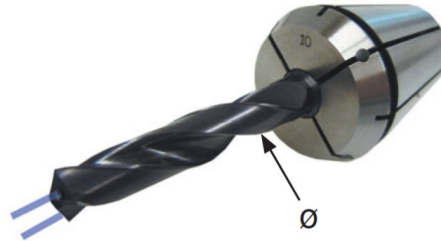

### ER 16C

### ER 20C

### ER 25C

### ER 32C


| Art.-Nr.       | Diameter range | Art.-Nr.       | Diameter range | Art.-Nr.       | Diameter range | Art.-Nr.       | Diameter range |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 116001C        | <b>Set</b>     | 120001C        | <b>Set</b>     | 125001C        | <b>Set</b>     | 132001C        | <b>Set</b>     |
| 8 pcs. ø3-ø10  |                | 10 pcs. ø4-ø13 |                | 13 pcs. ø4-ø16 |                | 17 pcs. ø4-ø20 |                |
| 116030C        | ø3.0           | 120030C        | ø3.0           | 125030C        | ø3.0           | 132030C        | ø3.0           |
| 116040C        | ø4.0           | 120040C        | ø4.0           | 125040C        | ø4.0           | 132040C        | ø4.0           |
| 116050C        | ø5.0           | 120050C        | ø5.0           | 125050C        | ø5.0           | 132050C        | ø5.0           |
| 116060C        | ø6.0           | 120060C        | ø6.0           | 125060C        | ø6.0           | 132060C        | ø6.0           |
| 116070C        | ø7.0           | 120070C        | ø7.0           | 125070C        | ø7.0           | 132070C        | ø7.0           |
| 116080C        | ø8.0           | 120080C        | ø8.0           | 125080C        | ø8.0           | 132080C        | ø8.0           |
| 116090C        | ø9.0           | 120090C        | ø9.0           | 125090C        | ø9.0           | 132090C        | ø9.0           |
| 116100C        | ø10.0          | 120100C        | ø10.0          | 125100C        | ø10.0          | 132100C        | ø10.0          |
|                |                | 120110C        | ø11.0          | 125110C        | ø11.0          | 132110C        | ø11.0          |
|                |                | 120120C        | ø12.0          | 125120C        | ø12.0          | 132120C        | ø12.0          |
|                |                | 120130C        | ø13.0          | 125130C        | ø13.0          | 132130C        | ø13.0          |
| <b>ER 40 C</b> |                | <b>ER 50 C</b> |                | 125140C        | ø14.0          | 132140C        | ø14.0          |
| 140001C        | <b>Set</b>     | 150001C        | <b>Set</b>     | 125150C        | ø15.0          | 132150C        | ø15.0          |
| 23 pcs. ø4-ø26 |                | 7 pcs. ø8-ø32* |                | 125160C        | ø16.0          | 132160C        | ø16.0          |
| 140040C        | ø4.0           | 150120C        | ø12.0          |                |                | 132170C        | ø17.0          |
| 140050C        | ø5.0           | 150130C        | ø13.0          |                |                | 132180C        | ø18.0          |
| 140060C        | ø6.0           | 150140C        | ø14.0          |                |                | 132190C        | ø19.0          |
| 140070C        | ø7.0           | 150150C        | ø15.0          |                |                | 132200C        | ø20.0          |
| 140080C        | ø8.0           | 150160C        | ø16.0          |                |                |                |                |
| 140090C        | ø9.0           | 150170C        | ø17.0          |                |                |                |                |

We reserve the right to make technical changes.

# Collets

Collets DIN 6499 sealed  
for tools with inner cooling systems

**Only for nominal diameter**

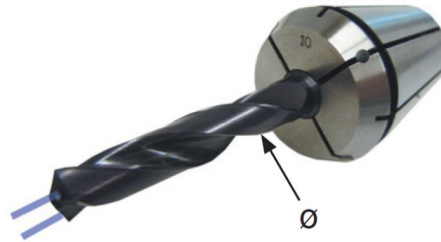

## ER 16C

## ER 20C

## ER 25C

## ER 32C

| Art.-Nr. | Diameter range | Art.-Nr.                     | Diameter range | Art.-Nr. | Diameter range | Art.-Nr. | Diameter range |
|----------|----------------|------------------------------|----------------|----------|----------------|----------|----------------|
| 140100C  | ø10.0          | 150180C                      | ø18.0          |          |                |          |                |
| 140110C  | ø11.0          | 150190C                      | ø19.0          |          |                |          |                |
| 140120C  | ø12.0          | 150200C                      | ø20.0          |          |                |          |                |
| 140130C  | ø13.0          | 150210C                      | ø21.0          |          |                |          |                |
| 140140C  | ø14.0          | 150220C                      | ø22.0          |          |                |          |                |
| 140150C  | ø15.0          | 150230C                      | ø23.0          |          |                |          |                |
| 140160C  | ø16.0          | 150240C                      | ø24.0          |          |                |          |                |
| 140170C  | ø17.0          | 150250C                      | ø25.0          |          |                |          |                |
| 140180C  | ø18.0          | 150260C                      | ø26.0          |          |                |          |                |
| 140190C  | ø19.0          | 150270C                      | ø27.0          |          |                |          |                |
| 140200C  | ø20.0          | 150280C                      | ø28.0          |          |                |          |                |
| 140210C  | ø21.0          | 150290C                      | ø29.0          |          |                |          |                |
| 140220C  | ø22.0          | 150300C                      | ø30.0          |          |                |          |                |
| 140230C  | ø23.0          | 150310C                      | ø31.0          |          |                |          |                |
| 140240C  | ø24.0          | 150320C                      | ø32.0          |          |                |          |                |
| 140250C  | ø25.0          | 150330C                      | ø33.0          |          |                |          |                |
| 140260C  | ø26.0          | 150340C                      | ø34.0          |          |                |          |                |
|          |                |                              |                |          |                |          |                |
|          |                | * ø8, 10, 12, 16, 20, 25, 32 |                |          |                |          |                |

We reserve the right to make technical changes.